




**SPECIFICATION SHEET**

<b>SPECIFICATION SHEET NO.</b>	Q1201-FB455K0000L010	
<b>DATE</b>	Dec. 01, 2023	
<b>REVISION</b>	A0	Updated With Most Recent Data - Official First Release
<b>DESCRIPTION AND MAIN PARAMETRICS</b>	<p>KHz Dip Ceramic Filter L11.0*W7.0*H8.0mm 5 Pins CF W Series            455.0KHz, 6dB Bandwidth: ±1.5KHz Min.; 50dB Selectivity:±4.5KHz Max.            Stop Band Attenuation: 60dB Min.@F0±100KHz; Ripple: 3.0dB Max.            Insertion Loss: 8.0dB Max. Input/Output Impedance:2.0 Kohm            Operating Temp. Range -20°C ~+85°C, Packed in Bulk            RoHS/RoHS III compliant, RoHS Annex III lead Exemption            (exempt per RoHS EU 2015/863)</p>	
<b>CUSTOMER</b>		
<b>CUSTOMER PART NO.</b>		
<b>CROSS REF. PART NO.</b>		
<b>ORIGINAL MFG/PART NO.</b>	TGS/CF 455JTW BLH/LT455JTW	
<b>PART CODE</b>	FB455K0000L010	

<b>VENDOR APPROVE</b>			
Issued/Checked/Approved			
DATE: Dec. 01, 2023			

<b>CUSTOMER APPROVE</b>	
DATE:	
12/1/2023	

12/1/2023

**KHZ DIP CERAMIC FILTER STANDARD TYPE CF W SERIES**

**MAIN FEATURE**

- KHz Dip Ceramic Filter CF W Series
- Case Dimension L11.0\*W7.0\*H8.0mm, 5 Pins
- Low Cost And Short Shipment
- Cross More Competitors Part CFWL Series
- RoHS/RoHS III compliant, RoHS Annex III lead Exemption (exempt per RoHS EU 2015/863)



**APPLICATION**

- Communication Electronics

**PART CODE GUIDE**

**RFQ**  
Request For Quotation

FB	455K0000	L	010
1	2	3	4

1. FB: Part family Code for KHz Dip Ceramic Filter L11.0\*W7.0\*H8.0mm 5 Pins CF W Series
2. 455K0000: Frequency range code for 455.0000KHz
3. L: Dip type, Package in bulk
4. 010: Internal Control Code or Special Parameters Code Letter A~Z or digits (1-9)


**HOW TO ORDER**

Please follow up **Part Code Guide** and indicate pat code when you order or RFQ.


**KHZ DIP CERAMIC FILTER STANDARD TYPE CF W**

**DIMENSION** (Unit: mm)

Image for reference




**Top View**

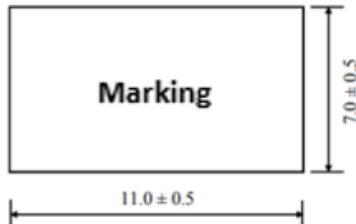

**Marking**

Line 1: Series Code  
Line 2: Frequency Range  
+ Internal Code


**Bottom View**

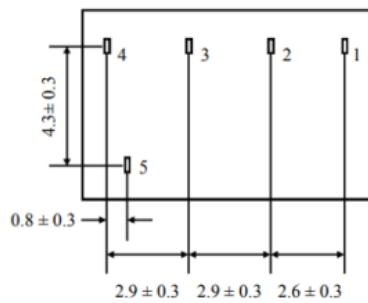

**Connection**

Pin 1: Input  
Pin 2, Pin 3, Pin 4: Ground  
Pin 5: Output

**Side View**




**KHZ DIP CERAMIC FILTER STANDARD TYPE CF W**

**GENERAL ELECTRICAL PARAMETERS**

PARAMETER	UNITS	VALUE			CONDITION
		MIN.	TYPICAL	MAX.	
Operation Temperature	°C	-20		+85	
Storage Temperature	°C	-40		+85	
Temperature Stability	%			±0.3	@ -20°C ~+85°C
Insulation Resistance	MΩ	100			@DC 100V 1 minute
RoHS Status	RoHS/RoHS III compliant, RoHS Annex III lead Exemption (exempt per RoHS EU 2015/863)				

**MEASURING CIRCUIT**

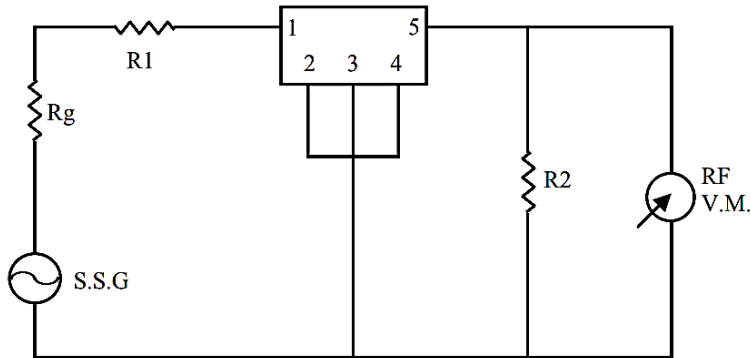

**KHZ DIP CERAMIC FILTER STANDARD TYPE CF W**
**MAIN ELECTRICAL PARAMETERS - Ta = 25°C**

Part Code	Frequency Range (KHz)	Bandwidth (6dB) Min.(KHz)	Selectivity (50dB) Max. (KHz)	Stop Band Attenuation Min. (dB)	Ripple Max. (dB)	Insertion Loss Max.(dB)	Input/ Output Impedance (KΩ)
FB455K0000L001	455±1.0	±15.0	±30.0	30	2.0	5.0	1.5
FB455K0000L002	455±1.0	±12.5	±24.0	45	2.0	5.0	1.5
FB455K0000L003	455±1.0	±10.0	±20.0	45	2.0	5.0	1.5
FB455K0000L004	455±1.0	±7.5	±15.0	45	2.0	5.0	1.5
FB455K0000L005	455±1.0	±6.0	±12.5	45	2.0	5.0	2.0
FB455K0000L006	455±1.0	±4.5	±10.0	45	2.0	5.0	2.0
FB455K0000L007	455±1.0	±3.0	±9.0	45	2.0	5.0	2.0
FB455K0000L008	455±1.0	±3.0	±9.0	50	2.0	5.0	2.0
FB455K0000L009	455±1.0	±2.0	±7.5	50	2.0	7.0	2.0
<b>FB455K0000L010*</b>	<b>455±1.0</b>	<b>±1.5</b>	<b>±4.5</b>	<b>60</b>	<b>3.0</b>	<b>8.0</b>	<b>2.0</b>
FB450K0000L001	450±1.0	±15.0	±30.0	30	2.0	5.0	1.5
FB450K0000L002	450±1.0	±12.5	±24.0	45	2.0	5.0	1.5
FB450K0000L003	450±1.0	±10.0	±20.0	45	2.0	5.0	1.5
FB450K0000L004	450±1.0	±7.5	±15.0	45	2.0	5.0	1.5
FB450K0000L005	450±1.0	±6.0	±12.5	45	2.0	5.0	2.0
FB450K0000L006	450±1.0	±4.5	±10.0	45	2.0	5.0	2.0
FB450K0000L007	450±1.0	±3.0	±9.0	45	2.0	5.0	2.0
FB450K0000L008	450±1.0	±3.0	±9.0	50	2.0	5.0	2.0
FB450K0000L009	450±1.0	±2.0	±7.5	50	2.0	7.0	2.0
<b>FB450K0000L010*</b>	<b>450±1.0</b>	<b>±1.5</b>	<b>±4.5</b>	<b>60</b>	<b>3.0</b>	<b>8.0</b>	<b>2.0</b>

Note: \*: Spurious @(0.1-1.0MHz): 50dB Min.

**KHZ DIP CERAMIC FILTER STANDARD TYPE CF W**

**MEASUREMENT**

- Measurement Condition: Measurement shall be carried out at the standard temperature of 25±2°C. If no specific requirements, Test can be carried out under 5-35°C.

**PHYSICAL CHARACTERISTICS**

Test Items	Measurement Condition	Requirement
Random Drop	Filter shall be measured after 3 times random drops from the height of 30cm on concrete floor	No visible damage and it meet Table 1
Vibration	Filter shall be measured after being applied vibration of amplitude of 1.5mm with 10-55Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours	No damage and it meet Table 1.
Solderability	Lead terminals are immersed in aide solder for 5 sec and then immersed in soldering bath of 230±5°C, for 3±0.5 sec.	At least 95% lead terminals shall be covered with solder.
Terminal strength Pulling	After force of 1kg for 10 seconds is applied to each terminal in axial direction, Filter shall be measured.	No damage, no cut-off and it meet Table 1.
Bending	After lead terminals shall be fixed at 2mm from filter’s body, they shall be folded up to 90°from their axial directions and folded back to – 90°.Then folded back to their axial direction, the speed of folding be each 3 seconds.	No damage, no cut-off and it meet Table 1

**KHZ DIP CERAMIC FILTER STANDARD TYPE CF W**

**ENVIRONMENTAL CHARACTERISTICS**

Test Items	Measurement condition	Requirement
Humidity	After being placed in a chamber with 90-95% R.H. at 40±2°C for 100 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall meet Table 1.
Resistance to Solder Heat	After being placed in a chamber with 80±2°C, for 100 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall meet Table 1.
High Temperature	After being placed in a chamber with 80±2°C, for 100 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall meet Table 1.
Low Temperature	After being placed in a chamber with -20±2°C, for 100 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall meet Table 1.
Heat Shock	After being kept at room temperature, filter shall be placed at temperature of -55 °C, for 30 minutes, then be placed at temperature. 85°C, for 30 minutes. After that returned to -55°C again. Repeated above cycle for 5 times. After being kept in room temp. for 1 hour, filter shall be measured	It shall meet Table 1.

*Table1*

Item	Center Frequency	Band width (6dB)	Selectivity (50dB)	Stop Band Attenuation (fo±100KHz)	Ripple	Spurious (0.1 -1.0MHz)	Insertion Loss
Specification	455±1.0KHz Max.	±1.5KHz Min.	±4.5KHz Max.	60dB Min.	3.0dB Max.	50dB Min.	8.0dB Max

## **KHZ DIP CERAMIC FILTER STANDARD TYPE CF W**

### **IMPORTANT NOTES AND DISCLAIMER**

1. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
2. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
3. *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does NextGen assume any liability for application assistance or customer product design.
4. *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
5. *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
6. *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.