

**SPECIFICATION SHEET**

|   |  |  |
|---|--|--|
| <b>SPECIFICATION SHEET NO.</b>          | R0313- CR0201FM1KS001  |  |
| <b>DATE</b>                             | Mar. 13, 2024  |  |
| <b>REVISION</b>                         | A0   | Updated With Most Recent Data - Official First Release |
| <b>DESCRIPTION AND MAIN PARAMETRICS</b> | <p>Thick Film Chip Resistors, 0201 (0603 Metric), CR01 Series,<br/>           Dimension L0.60*W0.30*H0.23mm, 2 Terminations<br/>           Tolerance: ±1%, Resistance 1K ohm, Dissipation Max. 1/20W @ 70°C<br/>           Temperature Coefficient Rate (TCR) Max. ±200ppm/°C<br/>           Operating Temp. Range -55°C ~+125°C<br/>           Package in Tape/Reel, 15,000pcs/Reel<br/>           RoHS/RoHS III compliant and HF</p> |  |
| <b>CUSTOMER</b>                         |  |  |
| <b>CUSTOMER PART NO.</b>                |  |  |
| <b>CROSS REF. PART NO.</b>              |  |  |
| <b>ORIGINAL MFG/PART NO.</b>            | Aillen/CR01FM1K  |  |
| <b>PART CODE</b>                        | CR0201FM1KS001   |  |

**VENDOR APPROVE**

Issued/Checked/Approved



DATE: Mar. 13, 2024

**CUSTOMER APPROVE**

DATE:

3/13/2024

## THICK FILM CHIP RESISTORS CR01 SERIES

### DESCRIPTION

The resistors are constructed in a high grade ceramic body (aluminum oxide). Internal metal electrodes are added at each end and connected by a resistive paste that is applied to the top surface of the substrate. The composition of the paste is adjusted to give the approximate resistance required and the value is trimmed to within tolerance by laser cutting of this resistive layer. The resistive layer is covered with a protective coat. Finally, the two external end terminations are added. For ease of soldering the outer layer of these end terminations is a Tin (lead free) alloy.

### MAIN FEATURE

- High Reliability And Stability
- Reduced Size Of Final Equipment
- Lower Assembly Costs
- Higher Component And Equipment Reliability
- RoHS III Compliant And Halogen Free Products



### APPLICATION

- Consumer Electrical Equipment
- EDP, Computer Application
- Telecom Application

### HOW TO ORDER

- Please indicate pat code OR custom parameters code and send us your RFQ by E-mail

**THICK FILM CHIP RESISTORS CR01 SERIES**

**PART CODE GUIDE**

**RFQ**

[Request For Quotation](#)

| CODE | NAME                                   | KEY SPECIFICATION OPTION   |
|------|--|--|
| CR   | Product code                           | Thick Film Chip Resistors  |
| 0201 | Size Code                              | 0201 (0603): L0.60*W0.30mm   |
| F    | Resistance Range<br><br>Tolerance Code | P: Jumper; B: +/-0.1%; D: +/-0.5%; F: +/-1%; J: +/-5%  |
| M    | Package Code                           | A: 4Kpcs/7"Reel; B:5kpcs/7"Reel; C:10kpcs/7"Reel; M:15kpcs/7"Reel;<br><br>D:10kpcs/10"Reel; E:20kpcs/10"Reel   |
| 1K   | Resistance value<br><br>code           | 0R: 0ohm; 1R2: 1.2ohm; 15R: 15ohm; 20R: 20ohm; 51R: 51ohm;<br><br>240R: 240ohm; 390R: 390ohm; 1K:1Kohm; 10K: 10Kohm; 4K99: 4.99Kohm;<br><br>13K7: 13.7Kohm; 25K5: 25.5Kohm; 100K: 100Kohm; 118K: 118Kohm;<br><br>1M: 1.0Mohm; 1M2: 1.2Mohm |
| S001 | Internal control<br><br>code,          | Custom letter A~Z, a-z or digits (0-9)   |

**THICK FILM CHIP RESISTORS CR01 SERIES**


**DIMENSION (Unit: mm)**

Image for reference



**General Marking:**  
Blank

CR01 series

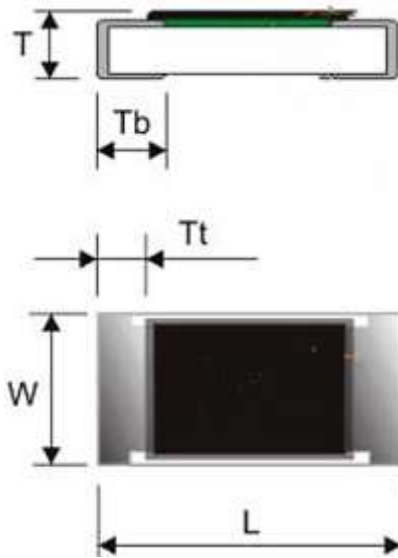


| Item | Dimension |
|------|-----------|
| L    | 0.60±0.03 |
| W    | 0.30±0.03 |
| T    | 0.23±0.03 |
| T b  | 0.15±0.05 |
| T t  | 0.10±0.05 |

**Resistors Construction For Reference**



**Recommended Solder Pad**

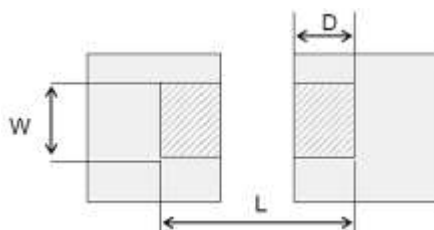

| Item | Dimension (mm) |
|------|----------------|
| W    | 0.25~0.30      |
| L    | 0.70~0.90      |
| D    | 0.30~0.40      |

**THICK FILM CHIP RESISTORS CR01 SERIES**
**GENERAL ELECTRONICAL CHARACTERISTICS**

| Item                   |          | Unit   | Symbol | Characteristic                      | Condition   |
|------------------------|----------|--------|--------|-------------------------------------|-------------|
| Product Name           |          |        | CR     | Thick Film Chip Resistors           |             |
| Size                   |          |        | 0201   | CR01 Series,<br>L0.60*W0.30*H0.23mm |             |
| Resistance Range       |          | Ω      |        | 1K                                  |             |
| Resistance Tolerance   |          | %      | F      | +/-1                                |             |
| TCR                    | 10Ω~10MΩ | ppm/°C |        | ±200                                |             |
|                        | 1Ω~9.76Ω |        |        | -200~+600                           |             |
| Max. Dissipation       |          | W      |        | 1/20                                | @ Tamb=70°C |
| Operating Temperature  |          | °C     |        | -55 ~+125                           |             |
| Max. Operation Voltage |          | V      |        | 25                                  | @DC or RMS  |
| Max. Overload Voltage  |          | V      |        | 50                                  | @DC or RMS  |

**Note**

- 1) This is the maximum voltage that may be continuously supplied to the resistor element, see "IEC publication 60115-8"
- 2) Max. Operation Voltage : So called RCWV (Rated Continuous Working Voltage) is determined by  

$$RCWV = \sqrt{\text{Rated Power} \times \text{Resistance Value}}$$
or Max. RCWV listed above, whichever is lower.
- 3) Test condition for jumper (0 Ω)

| ITEM                  | UNIT | SYMBOL | CHARACTERISTIC | CONDITION |
|-----------------------|------|--------|----------------|-----------|
| Power Rating At 70°C  | W    |        | 1/20           |           |
| Max. Resistance       | mΩ   |        | 50             |           |
| Rated Current         | A    |        | 1.0            |           |
| Peak Current          | A    |        | 2.5            |           |
| Operating Temperature | °C   |        | -55 ~+125      |           |

## THICK FILM CHIP RESISTORS CR01 SERIES

### PRODUCT CHARACTERIZATION

Standard values of nominal resistance are taken from the E24 & E96 series for resistors with a tolerance of  $\pm 0.1\%$ ,  $\pm 0.5\%$ ,  $\pm 1\%$  &  $\pm 5\%$ . The values of the E24/E96 series are in accordance with "IEC publication 60063"

### DERATING

The power that the resistor can dissipate depends on the operating temperature; see Fig.1

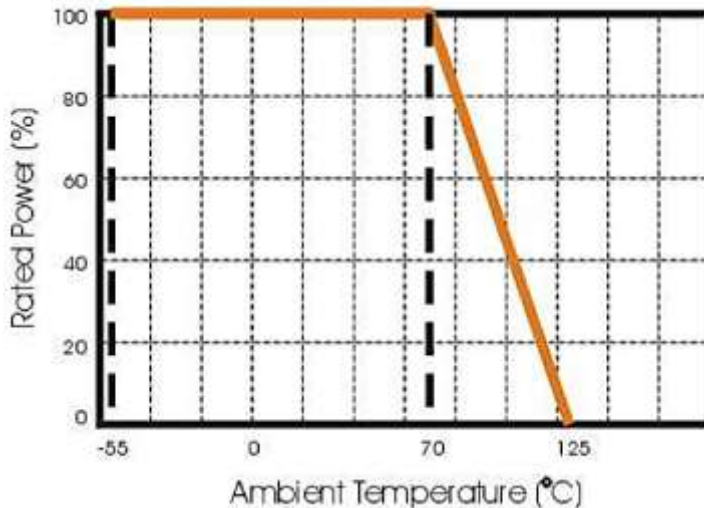


Fig 1 Maximum dissipation in percentage of rated power as a function of the ambient temperature for CR01

### MOUNTING

Due to their rectangular shapes and small tolerances, Surface Mountable Resistors are suitable for handling by automatic placement systems. Chip placement can be on ceramic substrates and printed-circuit boards (PCBs). Electrical connection to the circuit is by individual soldering condition. The end terminations guarantee a reliable contact.

### STORAGE AND HANDLING CONDITIONS

- 1) Products are recommended to be used up within two years since operation date as ensured shelf life. Check solderability in case shelf life extension is needed.
- 2) To store products with following condition: Temperature : 5 to 40°C Humidity: 20 to 70% relative humidity
- 3) Don't store products in a corrosive environment such as sulfide, chloride gas, or acid. It may cause oxidization of electrode, which easily be resulted in poor soldering b.To store products on the shelf and avoid exposure to moisture. Don't expose products to excessive shock, vibration, direct sunlight and so on.

**THICK FILM CHIP RESISTORS CR01 SERIES**

**REFLOW SOLDERING CONDITION**

The robust construction of chip resistors allows them to be completely immersed in a solder bath of 260 °C for 10 seconds. Therefore, it is possible to mount Surface Mount Resistors on one side of a PCB and other discrete components on the reverse (mixed PCBs). Surface Mount Resistors are tested for solderability at 235 °C during 2 seconds. The test condition for no leaching is 260°C for 30 seconds. Typical examples of soldering processes that provide reliable joints without any damage are given in Fig 2.

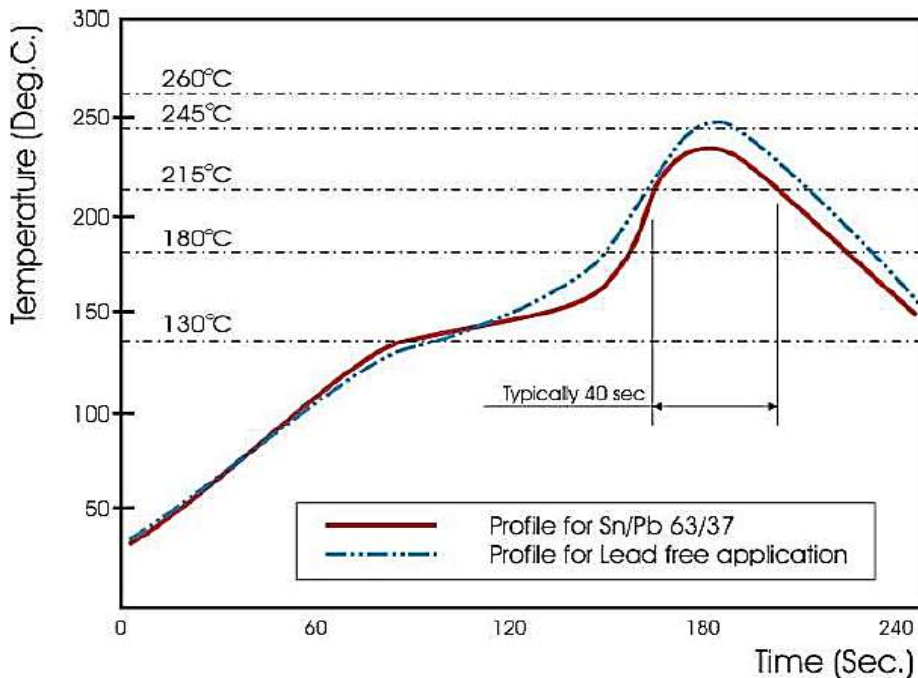


Fig 2. Infrared soldering profile for Chip Resistors

**TEST AND REQUIREMENTS**

Essentially all tests are carried out according to the schedule of IEC publication 115-8, category **LCT/UCT/56**(rated temperature range: **Lower Category Temperature, Upper Category Temperature**; damp heat, long term, 56 days). The testing also meets the requirements specified by EIA, EIAJ and JIS. The tests are carried out in accordance with IEC publication 68, "Recommended basic climatic and mechanical robustness testing procedure for electronic components" and under standard atmospheric conditions according to IEC 60068-1, subclause 5.3. Unless otherwise specified, the following value supplied

Temperature: 15 °C to 35 °C. Relative humidity: 45% to 75%.

Air pressure: 86kPa to 106 kPa (860 mbar to 1060 mbar).

All soldering tests are performed with mildly activated flux.

**THICK FILM CHIP RESISTORS CR01 SERIES**
**TEST AND REQUIREMENT (JIS C 5201-1 : 1998)**

| TEST   | PROCEDURE / TEST METHOD   | REQUIREMENT   |       |
|--|---|---|-------|
|  |   | Resistor  | Ω     |
| Electrical Characteristics<br>JISC5201-1: 1998<br>Clause 4.8 | - DC resistance values measurement<br>- Temperature Coefficient of Resistance (T.C.R)<br>Natural resistance change per change in degree centigrade.<br>$\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/}^\circ\text{C)}$ t1 : 20°C+5°C-1°C; t2 : -55°C or +125°C<br>R1 : Resistance at reference temperature (20°C+5°C/- 1°C)<br>R2: Resistance at test temperature (-55°C or +125°C) | Within the specified tolerance<br>Refer to "QUICK REFERENCE DATA"                     | <50mΩ |
| Short time overload (S.T.O.L) Clause 4.13                    | Permanent resistance change after a 5second application of a voltage 2.5 times RCWV or the maximum overload voltage specified in the above list, whichever is less.   | ΔR/R max.<br>±(2%+0.10Ω)  | <50mΩ |
| Resistance to soldering heat(R.S.H) Clause 4.18              | Un-mounted chips completely immersed for 10±1second in a SAC solder bath at 260°C±5°C   | ΔR/R max.<br>± (1%+0.05Ω)<br>no visible damage  | <50mΩ |
| Solderability Clause 4.17                                    | Un-mounted chips completely immersed for 2±0.8 second in a SAC solder bath at 235°C±5°C   | 95% coverage min., good tinning and no visible damage                                 |       |
| Temperature cycling Clause 4.19                              | 30 minutes at -55°C±3°C, 2~3 minutes at 20°C+5°C-1°C, 30 minutes at +125°C±3°C, 2~3 minutes at 20°C+5°C1°C, total 5 continuous cycles   | ΔR/R max.<br>±(1%+0.05Ω)  | <50mΩ |
| Damp Heat (Load life in humidity) Clause 4.24                | 1000 +48/-0 hours, loaded with RCWV or Vmax in humidity chamber controller at 40°C±2°C and 90~95% relative humidity, 1.5hours on and 0.5 hours off  | 10Ω≤R<1MΩ :<br>ΔR/R max.<br>±(3%+0.10Ω)<br>R<10Ω, R≥1MΩ :<br>ΔR/R max.<br>±(5%+0.10Ω) | <50mΩ |



**THICK FILM CHIP RESISTORS CR01 SERIES**

**TEST AND REQUIREMENT (JIS C 5201-1 : 1998)**

| TEST                                 | PROCEDURE / TEST METHOD  | REQUIREMENT   |       |
|--------------------------------------|--|---|-------|
|                                      |  | Resistor  | 0Ω    |
| Load Life (Endurance)<br>Clause 4.25 | 1000+48/-0 hours; loaded with RCWV or V max in chamber controller 70±2°C, 1.5 hours on and 0.5 hours off | Ditto.  |       |
| Bending strength<br>Clause 4.33      | Resistors mounted on a 90mm glass epoxy resin PCB(FR4), bending once 5mm for 10sec                       | No visual damaged, ΔR/R max. ±(1%+0.05Ω)            | <50mΩ |
| Adhesion<br>Clause 4.32              | Pressurizing force: 3N, Test time: 10±1sec.  | No remarkable damage or removal of the terminations |       |

**THICK FILM CHIP RESISTORS CR01 SERIES**

**REEL DIMENSION (Unit: mm)**

7": 15,000Ppcs/Reel



| Code | Dimension 7" | Dimension 10" | Dimension 13" |
|------|--------------|---------------|---------------|
| A    | 178.0+/-2.0  | 254.0+/-2.0   | 330.0+/-2.0   |
| B    | 60.0 +/-1.0  | 100 +/-1.0    | 100+/-1.0     |
| C    | 13.0+/-0.20  | 13.0+/-0.20   | 13.0+/-0.20   |
| T    | 9.0+/-0.50   | 9.0+/-0.5     | 9.0+/-0.5     |

**TAPE DIMENSION (Unit: mm)**



| Code | Dimension |
|------|-----------|
| A    | 0.67±0.05 |
| B    | 0.37±0.05 |
| W    | 8.00±0.20 |
| F    | 3.50±0.05 |
| E    | 1.75±0.10 |
| P 1  | 2.00±0.05 |
| P0   | 4.00±0.05 |
| ΦD   | 1.50±0.10 |
| T    | 0.45±0.05 |

**TAPING QUANTITY AND TAPE MATERIAL**

| Tape      | Paper Tape |     |     |            |     |     | Embossed Tape | Bulk Cassette |
|-----------|------------|-----|-----|------------|-----|-----|---------------|---------------|
|           | 4 mm Pitch |     |     | 2 mm Pitch |     |     | 4 mm Pitch    |               |
| Reel Size | 7"         | 10" | 13" | 7"         | 10" | 13" | 7"            |               |
| CR01      | -          | -   | -   | 15000pcs   | -   | -   | -             | -             |

## THICK FILM CHIP RESISTORS CR01 SERIES


### PERFORMANCE OF TAPING

#### Strength of Carrier Tape and Top Cover Tape

Carrier Tape: When a tensile force 1.02kgf is applied in the direction of unreeling the tape, the tape shall withstand this force. Top cover Tape: When a tensile force 1.02kgf is applied to the tape, the tape shall withstand this force.

#### Peel Force of Top Cover Tape

Unless otherwise specified, the peel force of top cover tape shall be 10.2 to 71.4 g f when the top cover tape is pulled at a speed of 300mm/min with the angle between the taped during peel and the direction of unreeling maintained at 165 to 180° as illustrated in Fig.

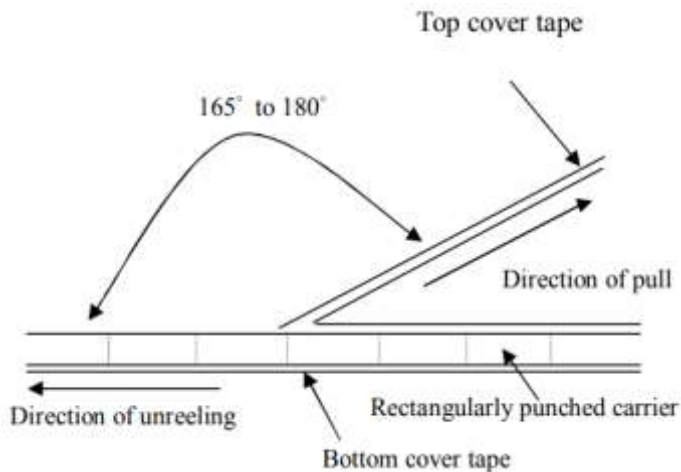

## THICK FILM CHIP RESISTORS CR01 SERIES

### ROHS COMPLIANCE

- The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for this product can be obtained can be obtained at Download Center.

### REACH COMPLIANCE

- REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained can be obtained at Download Center.

### IMPORTANT NOTES AND DISCLAIMER

1. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
2. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
3. *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does NextGen assume any liability for application assistance or customer product design.
4. *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
5. *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
6. *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.