




| | | |
|---|--|-------------------------------|
| SPECIFICATION SHEET NO. | R1010- FK10M70000S0VJ | |
| ORIGINAL MFG/PART NO | TGS/CF73 10.7MVJ TLH/LTCV10.7MJ/LTCV10.7MJUAC0-R1 | |
| DATE | Oct. 10, 2024 | |
| REVISION | A4 | Updated With Most Recent Data |
| DESCRIPTION AND MAIN PARAMETRICS | <p>MHz SMD Ceramic Filter, 3 Pads, FK Series Case 7030, Dimension L7.0*W3.0*H1.5mm 10.7MHz, Insertion Loss. 5.5 ± 2.0dB 3dB Band Width kHz (Min.) 150 ± 40KHz; Input/Output Impedance: 330Ω, Operating Temp. Range -20°C ~+80°C; Reflow Profile Condition 260 °C Max. Package in Tape/Reel, 1000pcs/Reel REACH/RoHS/RoHS III Compliant, RoHS Annex III lead Exemption (Exempt per RoHS EU 2015/863)</p> | |
| CUSTOMER | | |
| CUSTOMER PART NUMBER | | |
| CROSS REF. PART NUMBER | | |
| MEMO | | |

| | | | |
|-------------------------|---|--|---|
| VENDOR APPROVE | | | |
| Issued/Checked/Approved |  |  |  |
| Date: Oct. 10, 2024 | | | |

| | |
|-------------------------|--|
| CUSTOMER APPROVE | |
| | |
| Date: | |

MAIN FEATURE

- MHz SMD Ceramic Filter, 3 pads, Case 7030,
- Case Dimension L7.0*W3.0*H1.5mm
- Low Cost And Short Shipment
- Reflow Profile Condition 260 °C Max.
- Cross Main Competitors Parts SFECV series
- REACH/RoHS/RoHS III compliant, RoHS Annex III lead Exemption
(Exempt per RoHS EU 2015/863)

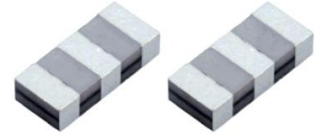


Image shown is a representation only. Exact specifications should be obtained from the product dimension.



APPLICATION

- Communication Electronics

HOW TO ORDER

- Please Follow Up Part Code Guide And Indicate Pat Code When You Order Or RFQ.

PART CODE GUIDE

RFQ
Request For Quotation


| CODE | NAME | KEY SPECIFICATION OPTION |
|------|--------------------|--|
| FK | Product Series | MHz SMD Ceramic Filter, 3 pads, Case 7030 Dimension L7.0*W3.0*H1.5mm |
| 10M7 | Frequency Range | 10M7: 10.7MHz |
| 0000 | Internal Control | Letter or Digits (A~Z, a~z or 1~9) |
| S | SMD Type Package | Tape/Reel |
| 0VJ | Special Parametric | Letter or Digits (A~Z, a~z or 1~9) |
| - XX | Suffix | Blank: N/A XX: Internal Control Code, Letter A~Z, a~z or digits (0~9) for Special/Custom Parameters |

DIMENSION (Unit: mm)

Case 7030, 3 Pads

L7.0*W3.0*H1.5mm

Top View

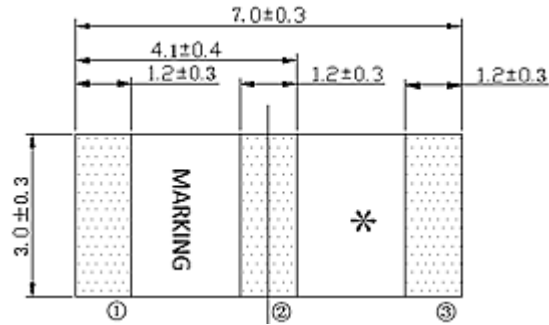

Marking:

MJ + QC Code


Note: See Page 6

"Marking List" For


different Part Code

Connection: ①: Pin 1: Input; ②: Pin 2: Ground; ③: Pin 3: Output


Side View

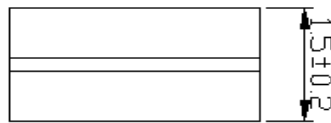

Bottom View

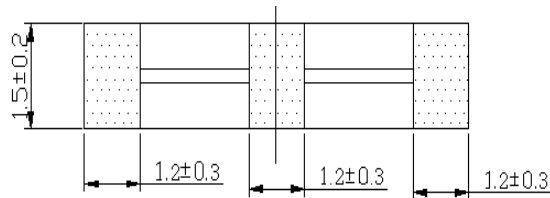


Structure

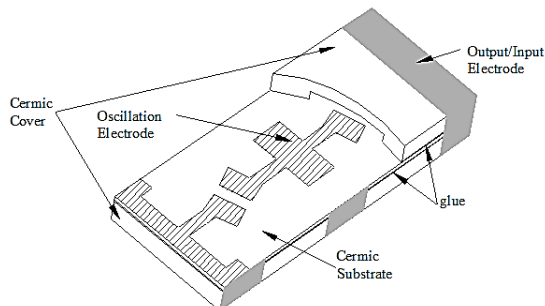

MEASUREMENT

- Parts shall be tested under the condition (Temp.: $20 \pm 15^\circ\text{C}$, Humidity $65 \pm 20\%$ R.H.) unless the standard condition (Temp.: $25 \pm 3^\circ\text{C}$, Humidity : $65 \pm 10\%$ R.H.) is regulated to measure .
- Measuring Circuit

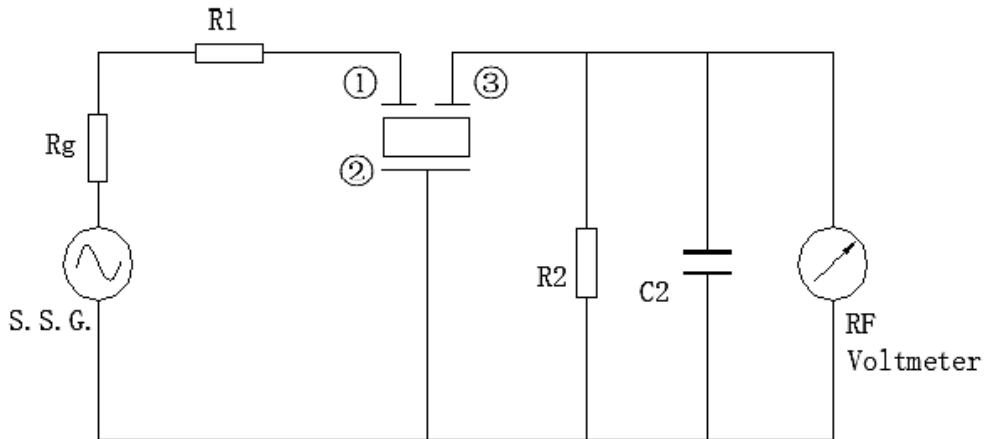

$R1 + Rg = R2 = 330\Omega \pm 5\%$, $Rg = 50\Omega$; $C2 = 10\text{ PF}$ (Including stray capacitance and capacitance of RF Voltmeter)

S.S.G: Output Voltmeter; ①: Input ②: Ground ③: Output

ELECTRICAL SPECIFICATIONS - Rating

| PARAMETER | SYMBOLS | VALUE | UNITS |
|---|------------------|------------|-------|
| Withstanding Voltage Max. @DC, 1 min. | - | 50 | V |
| Insulation Resistance Min. @10V, 1 min. | R _i | 100 | mΩ |
| Operating Junction e Temperature Range | T _J | -20 to +80 | °C |
| Storage Temperature Range | T _{STG} | -40 to +85 | °C |

ELECTRICAL CHARACTERISTICS PART I - FOR DIFFERENT PART CODE

| PART CODE | Center Frequency | 3dB Bandwidth Min. | 20dB Bandwidth Max. | Insertion Loss @Min. Loss Point | Ripple Max. (Within 3dB Bandwidth) |
|-----------------------|------------------|---------------------|---------------------|---------------------------------|------------------------------------|
| | MHz | KHz | KHz | dB | dB |
| FK10M70000S0AJ | 10.7±0.03 | 150±40 | 430 | 10.0 Max. | 1.0 |
| FK10M70000S0VJ | 10.7±0.03 | 150±40 | 380 | 5.5±2.0 | 1.0 |
| FK10M70000SAS3 | 10.7±0.03 | 180±40 | 520 | 7.0 Max. | 1.0 |
| FK10M70000SVS3 | 10.7±0.03 | 180±40 | 470 | 4.0±2.0 | 1.0 |
| FK10M70000SAS2 | 10.7±0.03 | 230±50 | 570 | 6.0 Max. | 1.0 |
| FK10M70000SVS2 | 10.7±0.03 | 230±50 | 510 | 3.5±2.0 | 1.0 |
| FK10M70000SAA5 | 10.7±0.03 | 280±50 | 650 | 6.0 Max. | 1.0 |
| FK10M70000SVA5 | 10.7±0.03 | 280±50 | 590 | 3.0±2.0 | 1.0 |
| FK10M70000SVA20 | 10.7±0.03 | 330±50 | 680 | 4.0±2.0 | 1.0 |
| FK10M70000SVA19 | 10.7±0.03 | F _n ±175 | 950 | 3.0±2.0 | 3.0 |
| FK10M70000S0HY | 10.7±0.03 | 110±30 | 320 | 6.0±2.0 | 1.0 |

ELECTRICAL CHARACTERISTICS PART II - FOR DIFFERENT PART CODE

| PART CODE | Center Frequency | Spurious Attenuation Min. | Input/Output Impedance | Temperature Characteristic @ -20°C to 80°C | Marking List |
|--------------------------------|------------------|---------------------------|------------------------|--|--------------|
| | MHz | dB | Ω | % | |
| FK10M70000S0AJ | 10.7±0.03 | 30 @9~12MHz | 330 | ±0.5 | MJ |
| FK10M70000S0VJ | 10.7±0.03 | 35 @9~12MHz | 330 | ±0.5 | MJ |
| FK10M70000SAS3 | 10.7±0.03 | 30 @9~12MHz | 330 | ±0.5 | S3 |
| FK10M70000SVS3 | 10.7±0.03 | 35 @9~12MHz | 330 | ±0.5 | S3 |
| FK10M70000SAS2 | 10.7±0.03 | 30 @9~12MHz | 330 | ±0.5 | S2 |
| FK10M70000SVS2 | 10.7±0.03 | 35 @9~12MHz | 330 | ±0.5 | S2 |
| FK10M70000SAA5 | 10.7±0.03 | 30 @9~12MHz | 330 | ±0.5 | A5 |
| FK10M70000SVA5 | 10.7±0.03 | 35 @9~12MHz | 330 | ±0.5 | A5 |
| FK10M70000SVA20 | 10.7±0.03 | 30 @9~12MHz | 330 | ±0.5 | A20 |
| FK10M70000SVA19 | 10.7±0.03 | 20 @5~15MHz | 470 | ±0.5 | A19 |
| FK10M70000S0HY | 10.7±0.03 | 35 @9~12MHz | 330 | ±0.5 | HY |

RELIABILITY


| TEST ITEMS | TEST METHOD AND CONDITIONS | REQUIREMENT |
|---------------------|--|--|
| Humidity | After being placed in a chamber with 90-95% R.H. at 40±2°C for 96 hours and then being placed in room temperature for 1 hour, filter shall be measured. | It shall meet Specification |
| High Temperature | After being placed in a chamber with 85±2 °C,for 96 hours and then being placed in room temperature for 1 hour, filter shall be measured. | It shall meet Specification |
| Low Temperature | After being placed in a chamber with -40±2 °C,for 96 hours and then being placed in room temperature for 1 hour, filter shall be measured. | It shall meet Specification |
| Temperature Cycling | After temperature cycling of blow table was performed 5 times, Filter shall be measured after being placed in natural conditions for 1h. Temp.: -20±3°C, Time: 30±3 min ; Temp.: -80±3°C, Time: 30±3 min. | It shall meet Specification |
| Vibration | Subject the filter to vibration for 2h.Each in x y and z axis with the amplitude of 1.5mm, The frequency shall be varied uniformly between the limits of 10Hz-55Hz-10Hz and then filter shall be measured. | It shall meet Specification |
| Mechanical Shock | Filter shall be measured after 3 times random dropping from the height of 1m on the wooden plate. | It shall meet Specification |
| Soldering Test | Passed through the reflow oven under the following condition, and left at room temp. for 24 hours before measurement. | It shall meet Specification |
| Solderability | Dipped in 235°C±5°C solder bath for 3s±0.5s with rosin flux (25wt% ethanol solution.) see <i>Suggested Reflow Profile</i> | The terminals shall be at least 95% covered by solder. |
| Board Bending | Mount on a glass-epoxy board(width =50mm, thickness=1.6mm),then bend it to 1mm displacement(velocity= 1mm/s) and keep it for 5s. | Mechanical damage such as break shall not occur |

Table 1


| TEST ITEMS | CHARACTERISTICS AFTER TEST | |
|-----------------------------|----------------------------|-------|
| | VALUE | UNITS |
| Center Frequency Drift Max. | ±30 | kHz |
| Insertion Loss Drift Max. | ±2.0 | dB |
| 3dB Bandwidth Drift Max. | ±25 | kHz |
| 20dB Bandwidth Drift Max. | ±60 | kHz |

Note: The limits in the above table are referenced to the initial measurements.


Soldering Test

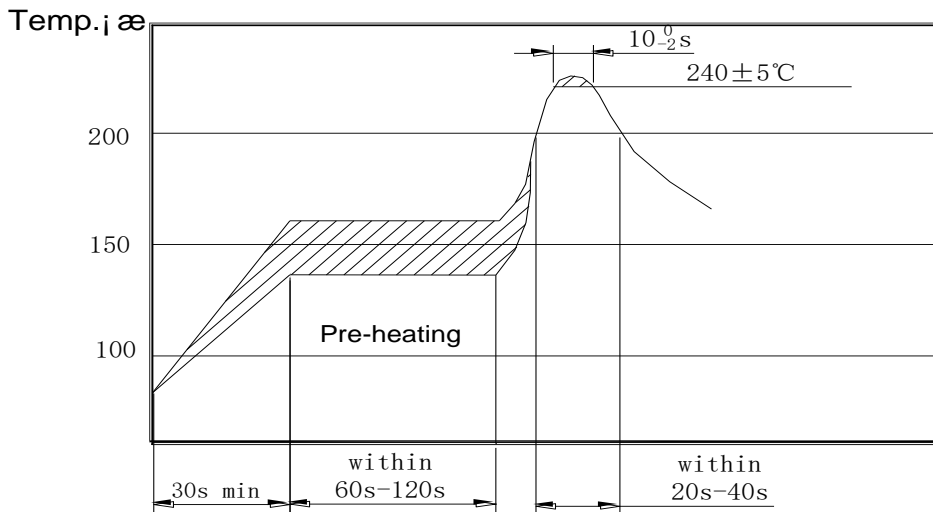


Board Bending

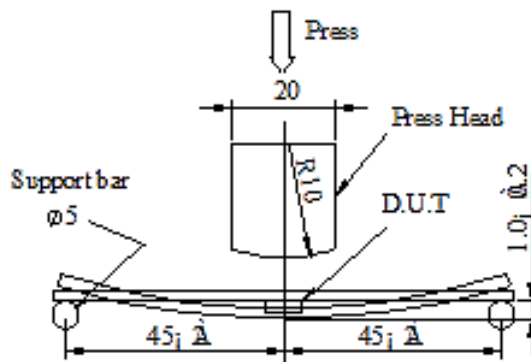

SUGGESTED REFLOW PROFILE - For Reference Only

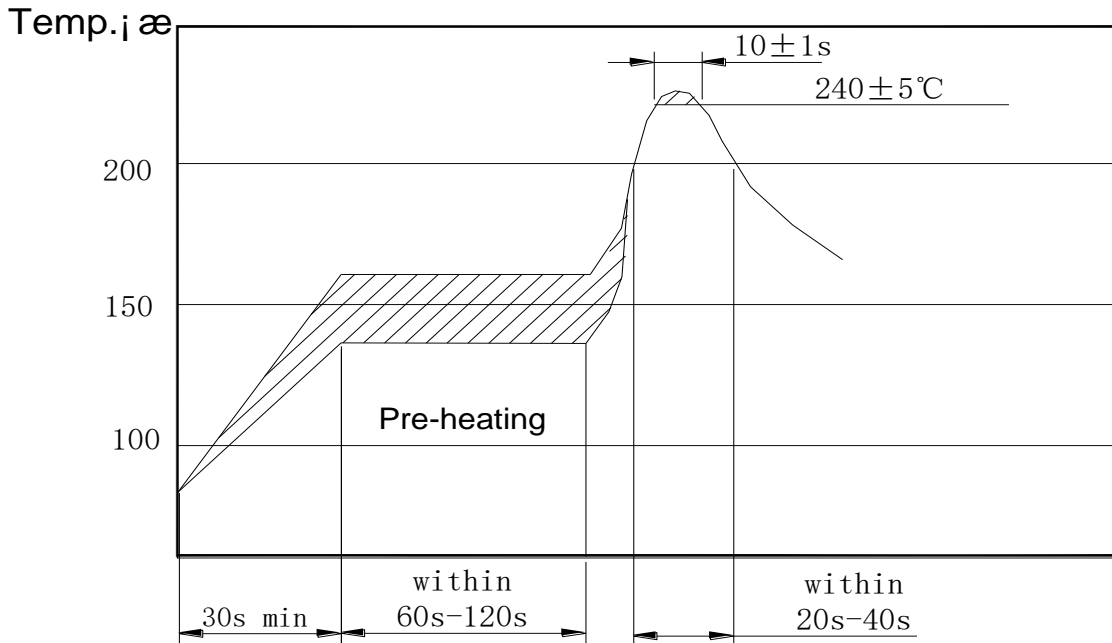


RECOMMENDED LAND PATTERN- (Unit: mm)

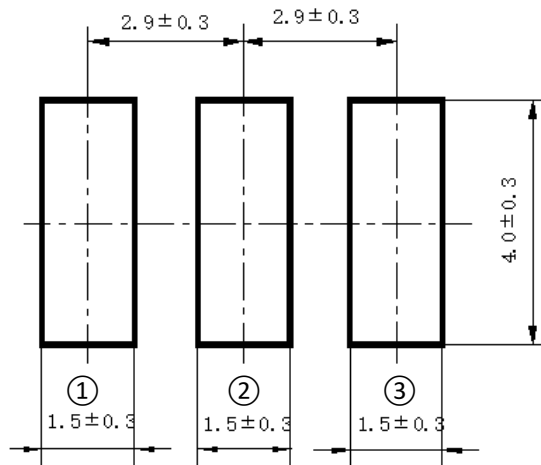


①: Pin 1: Input; ②: Pin 2: Ground; ③: Pin 3: Output


TPAE/REEL DIMENSIONS (Unit: mm)

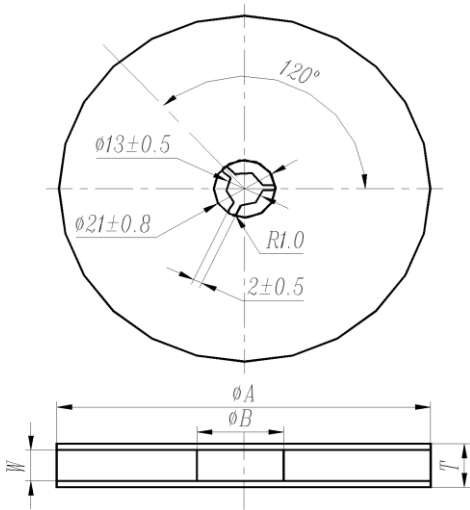

| Code | Dimension |
|-------------------|---------------|
| ϕA | 180 \pm 3.0 |
| ϕB | 60 Min. |
| W | 12.4 Min. |
| T | 19.4 Max. |
| Qty. Per Reel | 1000pcs |
| Carrier Tape Size | 12 |

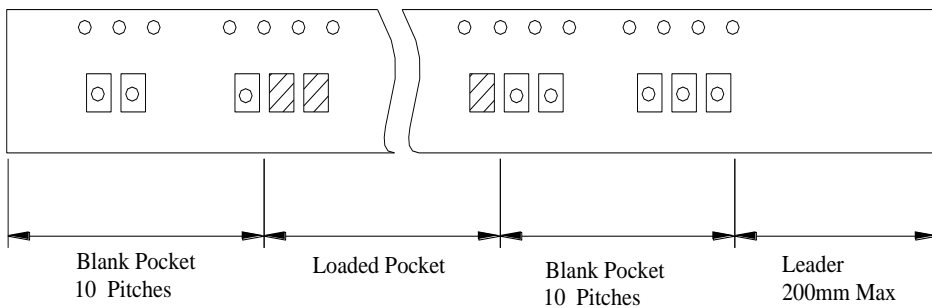

TEST CONDITION OF PEELING STRENGTH

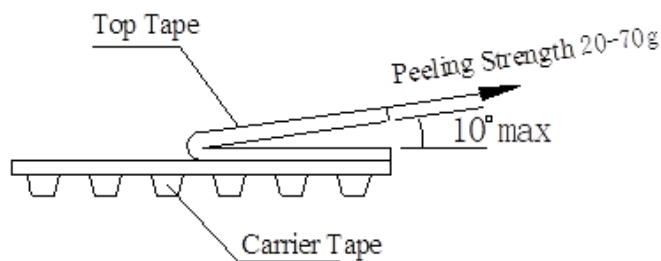

CAUTION

- Don't apply excess mechanical stress to the component and terminals at soldering. Do not use this product with bend.
- Do not clean or wash the component for it is not hermetically sealed.
- Do not use strong acidity flux, more than 0.2wt% chlorine content, in flow soldering.
- Don't be close to fire.
- This specification mentions the quality of the component as a single unit. Please insure the component is thoroughly evaluated in your application circuit
- Expire date (Shelf life) of the products is 12 months after delivery under the conditions of a sealed and an unopened package. Please use the products within 12 months after delivery. If you store the products for a long time (more than 12 months), use carefully because the products may be degraded in the solder-ability or rusty. Please confirm solder-ability and characteristics for the products regularly.
- Exposure components under soldering condition that is exceeding our recommendation will increase the failure dangerous.
- Please contact us before using the product as automobile electronic component.
- Please return one of these specifications after your signature of acceptance.
- When something gets doubtful with this specifications, we shall jointly work to get an agreement.
- For questions on technology, prices and delivery, please contact our sales offices or e-mail:
sales@NextGenComponent.com .

IMPORTANT NOTES AND DISCLAIMER

1. **ROHS COMPLIANCE:** The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for this product can be obtained at Download Center.
2. **REACH COMPLIANCE:** REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained at Download Center.
3. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
4. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
5. *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does *NextGen* assume any liability for application assistance or customer product design.
6. *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
7. *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
8. *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.