



Image shown is a representation only. Exact specifications should be obtained from the product dimension

PRODUCT NAME:	Connector Hood Side Entry 10A IP65 PG16
REVISION:	A3
NEXTGEN ORDER PART CODE*:	H10ASE2BPG16L1
CROSS REF. PART NO.:	09200101541
ORIGINAL MFG PART CODE:	H10A-SE-2B-PG16
ORIGINAL MFG PART NO.:	1100105101010
ORIGINAL MANUFACTURER:	Wain Electrical/Wain Connectors

*: Please Indicate this Part Code For RFQ/Order Support

WAIN
CONNECTORS



AUTHORIZED DISTRIBUTOR



NextGen Components, Inc.

US Warehouse Location: 9 Orchard Road, Suit 106, Lake Forest, CA 92630, USA

RFQ/Order Support: sales@NextGenComponent.com

Note: This coversheet was created by NextGen Components, Inc. ("NextGen"). The attached last document was created by the part manufacturer, not NextGen, and is provided strictly 'as is.' NextGen, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached last document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

DIMENSION – Unit: mm

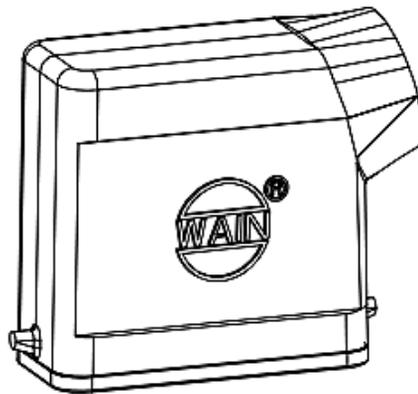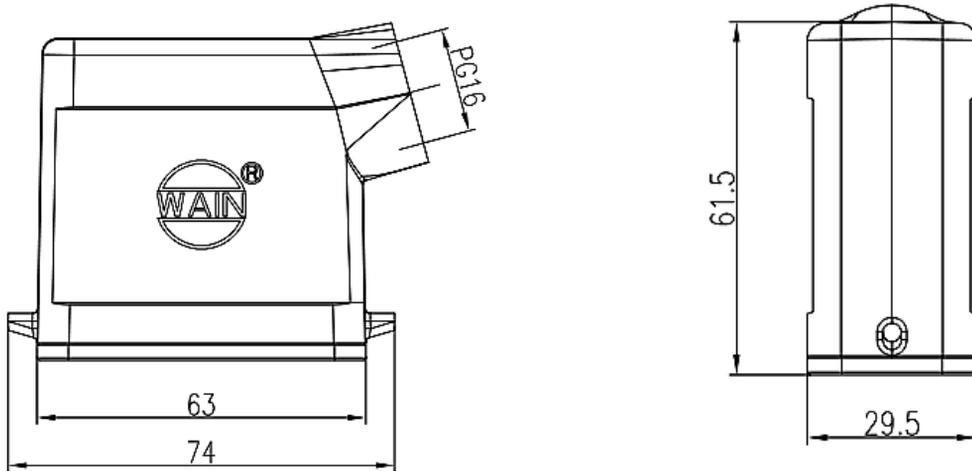

GENERAL PRODUCT ATTRIBUTES & TECHNICAL CHARACTERISTICS

ATTRIBUTE	DESCRIPTION
Product Category	Connectors, Interconnects/Heavy Duty Connectors Hoods
Product Name	Connector Hood Side Entry 3A IP65 PG11
Part Category No.	110010
Series Category No.	H10A
Specification	10A
Housing Type	Surface Mounting Upper Housing
Outgoing Method	Side Outlet
Locking Type	Single Lock
Thread Size	PG16
Housing Material	Die Casting Zinc
Housing Color	RAL 7037 (Field Gray)
Surface Treatment	Powder Coating
Interlocking Method	Metal Elastic Connection
Material	Galvanized Iron
Hoods/Housings Sealing	NBR
Flame Retardant Rating As Per UL94	V0
Working Temperature	-40 °C~+ 125 °C
Protection Rating	IP65 (acc. to IEC 60529 for coupled connector)
Cable Entry	Side Entry
No. of Cable Entries	1
Need Crimp Contacts Separately	No

PRODUCTS CERTIFICATIONS

APPROVALS	AUTHENTICATION
UL	
CUL	

ENVIRONMENTAL & EXPORT CLASSIFICATIONS

ATTRIBUTE	DESCRIPTION
RoHS Status	ROHS3 Compliant With Exemption
Moisture Sensitivity Level (MSL)	1 (Unlimited)
REACH Status	REACH Unaffected
ECCN	EAR99
HTSUS	8538.90.8180

