

SPECIFICATION SHEET NO.	T0526 – GBLC08CL00S0BC	
ORIGINAL MFG/PART NO.	 LGE Diodes/GBLC08C-L	
NEXTGEN PART CODE	GBLC08CL00S0BC	Indicate This Code For RFQ /Order
DATE	May. 26, 2026	
REVISION	A4	Updated With Most Recent Data
DESCRIPTION AND MAIN PARAMETRICS	SMD Plastic-Encapsulate ESD Protection Diodes, GBLC L Series Case SOD-323, 2 Pads, Ultra Low Capacitance, Bi-Directional Type Reverse Working Voltage (VRWM): 8.0V Clamping Voltage (Vc): 13.4VC Max.@1.0A Junction temperature Range -55°C ~ 150°C Package in Tape/Reel, 3000pcs/Reel RoHS/RoHS III compliant, RoHS Annex III lead Exemption (Exempt per RoHS EU 2015/863) and Halogen Free (HF)	
CUSTOMER		
CUSTOMER PART NUMBER		
CROSS REF. PART NUMBER		
MEMO		

VENDOR APPROVE			
Issued/Checked/Approved			
Effective Date: May. 26, 2026			

CUSTOMER APPROVE	
Date:	

DESCRIPTION

The GBLCxxC Series are ultra low capacitance transient voltage suppressor arrays, Designed to protect applications such as portable electronics and SMART phones. This series is available in both unidirectional and bidirectional configurations and is rated at 350 Watts for an 8/20 μ s waveshape. The GBLCxxC and Series meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. This series offers a ultra low capacitance and low leakage current in a miniature SOD-323 package.



Image shown is a representation only. Exact specifications should be obtained from the product dimension.

MAIN FEATURE

- Peak Power Dissipation: 300W (8/20 μ s)
- IEC61000-4-2 (ESD) ± 15 kV (air), ± 8 kV (contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC61000-4-5 (Lightning) 12A (8/20 μ s)
- Protects one directional I/O line (bidirectional)
- Low Clamping Voltage
- Response Time is < 1 ns
- Working voltages: 3V, 5V, 8V, 12V, 15V, 24V
- Meet MSL 1 Requirement
- Cross Competitors Parts and More.
- RoHS/RoHS III compliant, RoHS Annex III lead Exemption (Exempt per RoHS EU 2015/863) and Halogen Free (HF)



APPLICATION

- Cell phone Handsets And Accessories
- Microprocessor Based Equipment and Personal Digital Assistants (PDA's)
- Notebooks, Desktops And Servers
- Portable Instrumentation/Peripherals/USB Interface

ELECTRICAL CHARACTERISTICS

See Page 5 ~Page 6.

All Parameters are Subject To NextGen Components' Final Confirmation

HOW TO ORDER

- Please Follow Up Part Code Guide And Indicate NextGen Part Code GBLC08CL00S0BC For RFQ and Order.

RFQ


[Request For Quotation](#)

PART CODE GUIDE


CODE	NAME	KEY SPECIFICATION OPTION
GBLC	Product Series Code	SMD Plastic-Encapsulate ESD Protection Diodes, Case SOD-323, 2 pads, Bi-Directional Type
08C	Parameters Code	Letter or Digits (A~Z, a~z or 0~9)
L00S0	Internal Control Code	Letter or Digits (A~Z, a~z or 0~9)
BC	Marking Code	Marking "BC" or See Marking list For different part code
XX	Special/Custom Parameters Code	Letter or Digits (A~Z, a~z or 0~9) for Special Parametric Blank: N/A

DIMENSION - Unit: mm, Case SOD-323, Inch/mm

Top View

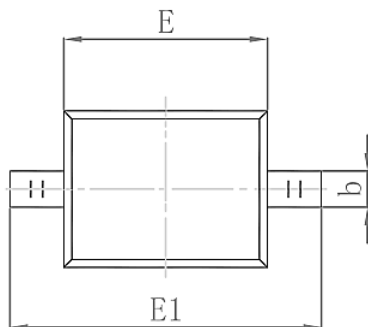



Side View

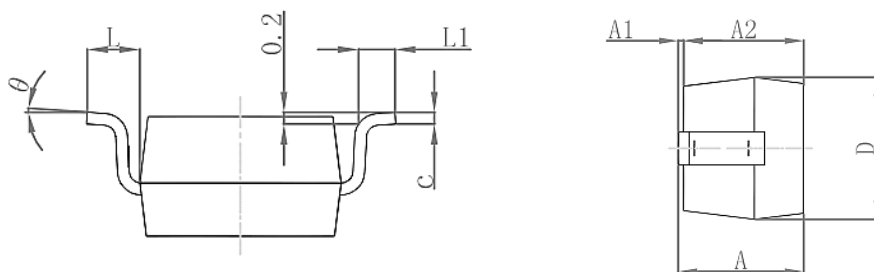

SYMBOL	DIMENSION (MM)		DIMENSION (INCH)	
	MIN.	MAX.	MIN.	MAX.
A	-	1.000	-	0.039
A1	-	0.1000	0.000	0.004
A2	0.800	0.900	0.031	0.035
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.550	2.750	0.100	0.108
L	0.475 REF.		0.019 REF.	
L1	0.250	0.400	0.010	0.016
θ	0	8 °	0 °	8 °

Recommend Pad Layout - Tolerance: $\pm 0.05\text{mm}$

Circuit Diagram

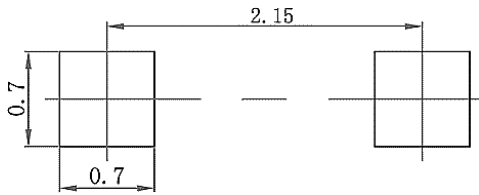

MECHANICAL CHARACTERISTICS

CASE	FLAMMABILITY RATING	TERMINALS	MARKING
JEDEC SOD-323 molded plastic body	UL 94V-0	High temperature soldering guaranteed: 260°C/10s	See Marking list For different part code


ABSOLUTE MAX. RATING - $T_A=25^{\circ}\text{C}$ unless otherwise specified, For Reference Only

PARAMETER	SYMBOLS	VALUE	UNITS
ESD per IEC 61000-4-2 (Air)	VESD	± 15	KV
ESD per IEC 61000-4-2 (Contact)	VESD	± 8	KV
Peak Pulse Power($t_p=8/20\mu\text{s}$ waveform)	PPP	300	W
Operating Temperature Range	TOPT	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature Range	TSTG	-55 ~ +150	$^{\circ}\text{C}$
Lead Solder Temperature- Max. (10s Duration)	TL	260 /10s	$^{\circ}\text{C}$


ELECTRICAL CHARACTERISTICS - TA=25° C unless otherwise specified, For Reference Only

PART CODE	MAX. V _{RWM}	MIN. V _B	I _T	V _C				MAX. I _R	TYP. C _T	MARKING
				MAX.	@A	MAX.	@A			
	V	V		V		V		μA	pF	
GBLC03CL00S0CC	3.0	4.0	1.0	7.0	1.0	13.9	8.0	2.0	0.8	CC
GBLC05CL00S0AC	5.0	6.0	1.0	9.8	1.0	18.3	8.0	1.0	0.8	AC
GBLC08CL00S0BC	8.0	8.5	1.0	13.4	1.0	18.5	8.0	1.0	0.8	BC
GBLC12CL00S0DC	12.0	13.3	1.0	19.0	1.0	28.6	6.0	1.0	0.8	DC
GBLC15CL00S0EC	15.0	16.7	1.0	24.0	1.0	31.8	5.0	1.0	0.8	EC
GBLC24CL00S0HC	24.0	26.7	1.0	43.0	1.0	56.0	3.0	1.0	0.8	HC

RATINGS AND CHARACTERISTICS CURVES- For Reference Only, Ta=25°C Unless Otherwise Specified.

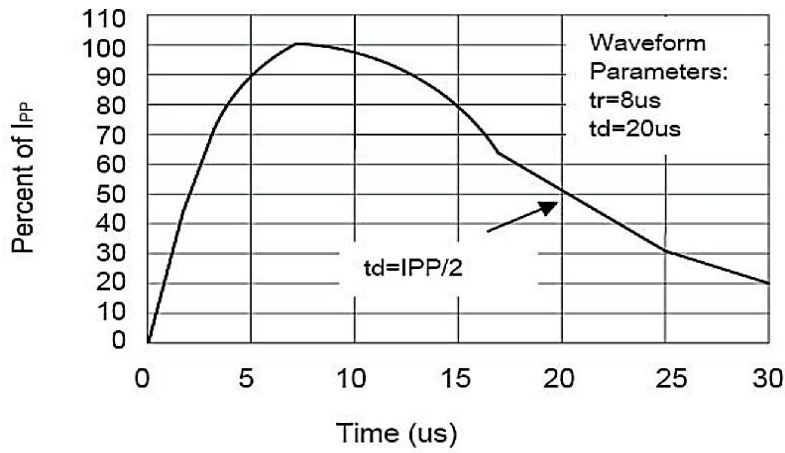


Pulse Waveform

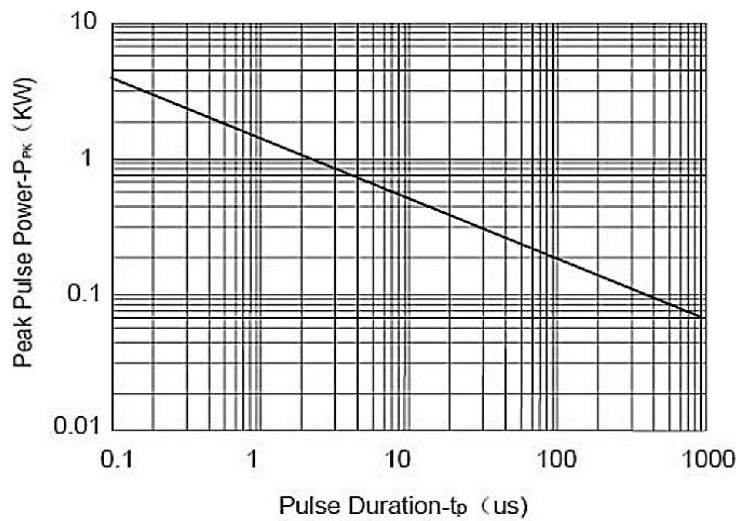


Non-Repetitive Peak Pulse Power vs. Pulse Time

RATINGS AND CHARACTERISTICS CURVES- For Reference Only, $T_a=25^{\circ}\text{C}$ Unless Otherwise Specified.

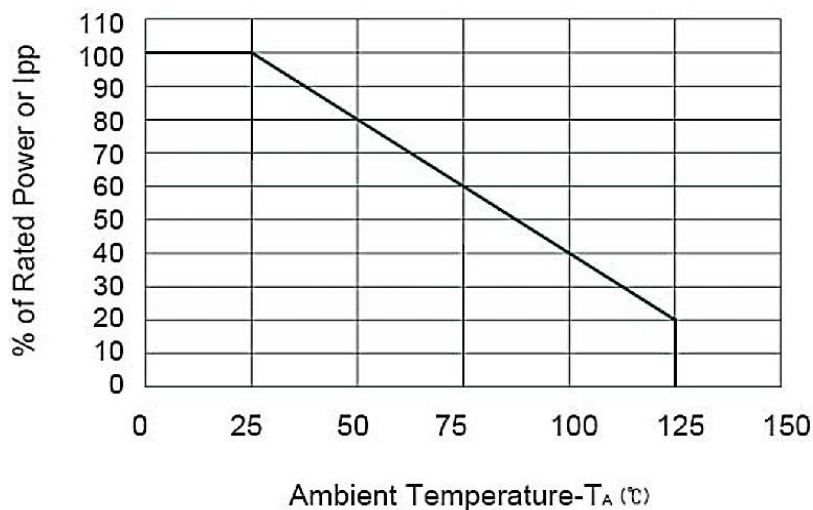


Power Derating Curve

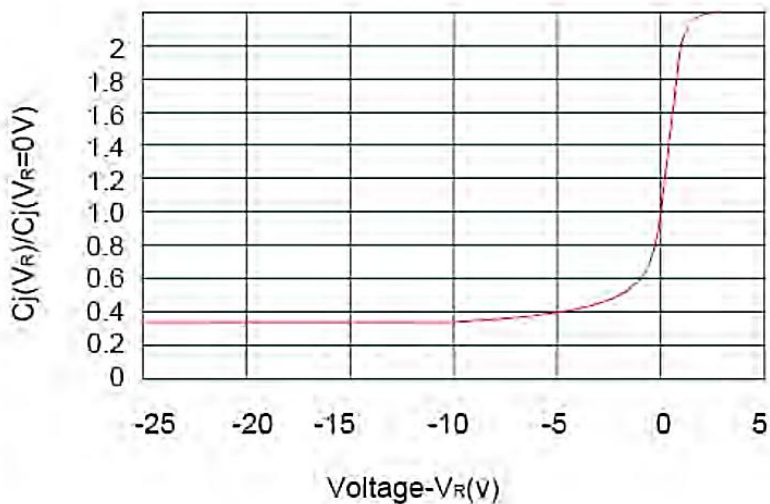


Junction Capacitance vs. Reverse Voltage

SUGGESTED REFLOW PROFILE - For Reference Only

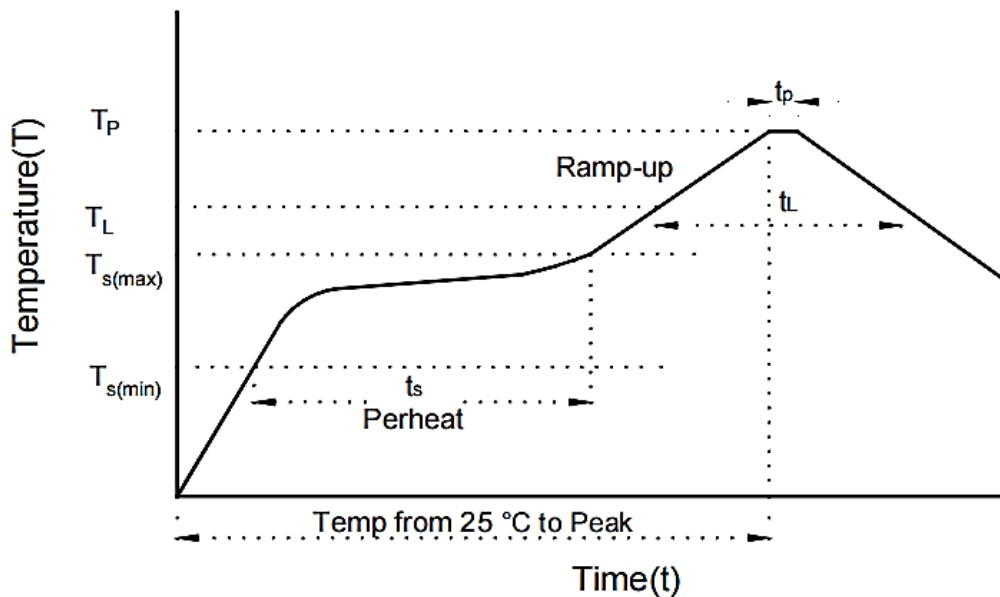

PROFILE FEATURE		PB-FREE ASSEMBLY
Average Ramp-up Rate (T_L Max to T_p)		3°C/second Max
Preheat	Temperature Min (T_s Min.)	150°C
	Temperature Max (T_s Max.)	200°C
	Time (t_s Min. to t_s Max.)	60 ~ 180 seconds
Time maintained above	Temperature (T_L)	217°C
	Time (t_L)	60 ~ 150 seconds
Peak/Classification Temperature (T_p)		260 °C
Time within 5°C of actual Peak Temperature (t_p)		10 seconds Max.
Ramp-down Rate		6 °C /Second Max.
Time 25 °C to Peak Temperature		8 Minutes Max.
Suggest reflow times		3 Times Max.

TAPE/REEL - Unit: mm, All Devices are packed in accordance with EIA standard RS-481-A and specifications

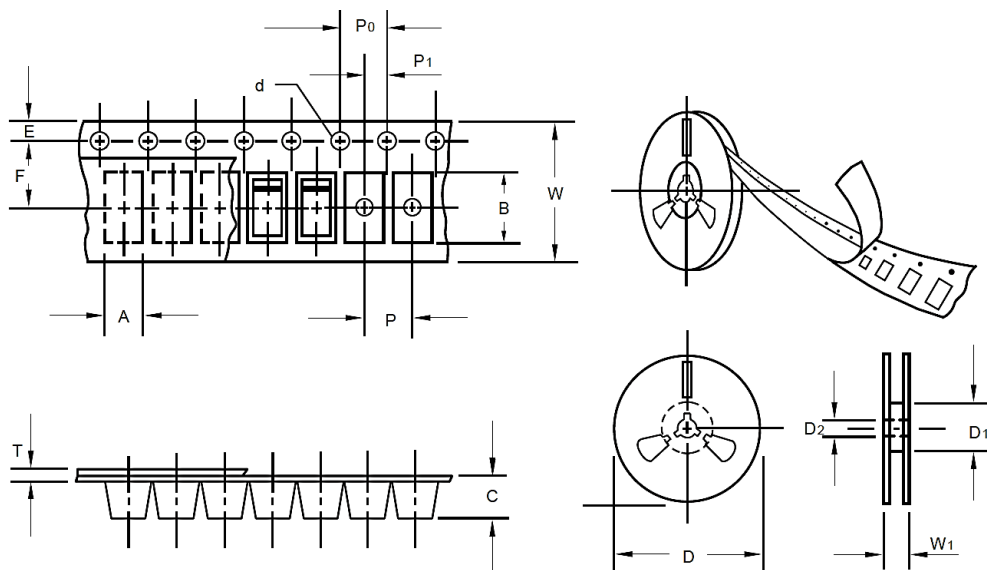

ITEM	SYMBOL	TOLERANCE	SO-323
Carrier width	A	0.1	1.46
Carrier Length	B	0.1	2.90
Carrier Depth	C	0.1	1.25
Sprocket hole	d	0.05	1.55
7"Reel outside diameter	D	2.0	178
7"Reel inner diameter	D1	Min.	50.0
Feed hole diameter	D2	0.5	13.0
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.06
Tape width	W	0.3	8.00
Reel width	W1	1.0	12.3
Qty. Per Reel (pcs)	3000		

IMPORTANT NOTES AND DISCLAIMER

1. **ROHS COMPLIANCE:** The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for this product can be obtained at Download Center.
2. **REACH COMPLIANCE:** REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained at Download Center.
3. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
4. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
5. *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does *NextGen* assume any liability for application assistance or customer product design.
6. *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
7. *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
8. *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.